




DA-100

1x4 Distribution Amplifier

ASI, 310M & SD-SDI

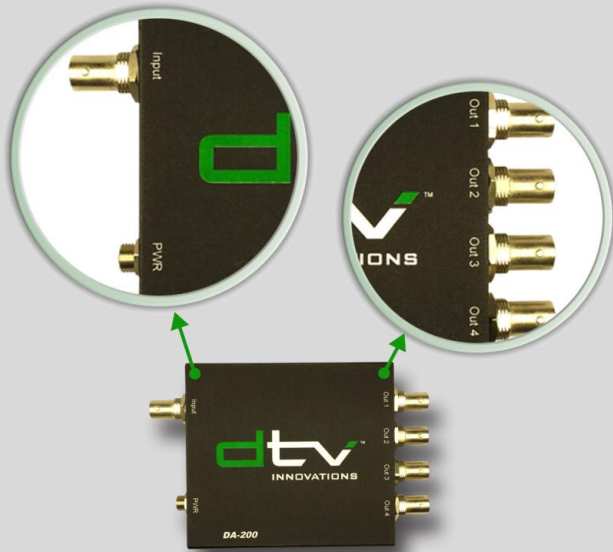

- 1 auto-sensing input, 75 ohm BNC connector
- Input signal lock detection LED
- 4 re-clocked outputs, 75 ohm BNC connector
- SD/HD Status LED
- Data rates from 270 Mbps to 3 Gbps
- Use with encoders, analyzers and other compliant equipment
- Ultra compact, reliable, cost effective solution
- Comes complete with power supply
- LED Power Indicator

DESCRIPTION

The **DA-200** is a compact multi-rate re-clocking distribution amplifier for use as a point-to-multipoint distribution hub of signals around your facility or an inline repeater to extend the signal over greater distances.

The **DA-200** provides automatic input detection, re-clocking and cable equalization at 0.270, 1.485 and 2.97 Gbps.

The **DA-200** passes embedded audio, ancillary ID and metadata information.

The **DA-200** has a small form factor replacing rack mounted equipment frames saving valuable rack space. The **DA-200** is a simple and cost effective solution.

SPECIFICATIONS

Formats

DVB-ASI:	270 Mbps
SMPTE 259M:	270 Mbps
SMPTE 292M:	1.485 Gbps
SMPTE 424M:	2.97 Gbps



Made in the USA

VISION + INNOVATION

March 2024. Specifications subject to change without notice.