




# CXQ-4

## Transport Stream Converter

High Density ASI to TSoIP Converter/Gateway

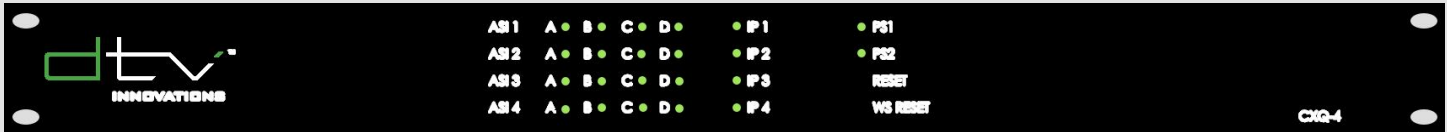

### TRANSPORT STREAM CONVERTER

DTV Innovations is now offering its latest innovation, the **CXQ-4**. With more and more Transport Streams being pushed through IT networks, there's now a growing need to convert DVB-ASI to TSoIP in an even higher-density implementation.

The **CXQ-4** contains up to four quad Transport Stream interface modules (CXQ-4-4, CXQ-4-8, CXQ-4-12, and CXQ-4-16). Each interface module converts four Asynchronous Serial Interface (DVB-ASI) Transport Streams to Transport Streams over IP streams (TSoIP) and outputs the four IP streams on 1, 2, 3, or 4 Ethernet connectors (corresponding to the number of input modules).

It complies with both the DVB and SMPTE2022 standards. The TSoIP interface supports Transport stream encapsulation and forward error correction as defined by the SMPTE 2022 specification.

The **CXQ-4** provides a total of up to four (4) Ethernet outputs, each containing up to 4 TSoIP transport streams making it an ideal and cost effective multi-channel ASI to IP gateway

### Features List

- ✓ Accepts 4, 8, 12, or 16 DVB-ASI Transport Streams
- ✓ Up to four independent Quad interface modules in 1 RU chassis
- ✓ Web Server User Interface for configuration and monitoring
- ✓ SNMP remote monitoring
- ✓ Forward Error Correction (FEC) – SMPTE 2022
- ✓ Encapsulation – UDP or RTP
- ✓ IPv6 & Source Specific Multicast are supported
- ✓ Dual Power Supplies for failsafe Operation
- ✓ Field Upgradable & Factory Expandable
- ✓ Ethernet - IEEE 802.3ab RJ-45 with LEDs  
100/1000 Auto Sense

**VISION + INNOVATION**

March 2024. Specifications subject to change without notice.



# CXQ-4

## Transport Stream Converter

High Density ASI to TSoIP Converter/Gateway



### INTERFACE SPECIFICATIONS

#### ASI

- Connector: BNC 75 ohm
- Data Rate to: 270 Mbps +/- 10ppm in, +/-3ppm out
- Logic Levels: 800mV +/-10%
- Data Rate: Accuracy: 3ppm

#### SMPTE 2022

- Transport stream encapsulation UDP or RTP
- Transport stream packet size 188 or 204 bytes
- TS packet / IP packet 1-7
- FEC Size: L : 1-20
- FEC Size: D : 4-20
- FEC Size: LxD : 4 -100

#### Network


- Four 100/1000 Base-TX Ethernet Ports (RJ-45)
- Web-Server user interface
- User Interface – IP Configuration
- SNMP remote monitoring

### ELECTRICAL SPECIFICATIONS

- Maximum Power: 35W
- Supply voltage range: 85-264 VAC/47-63HZ
- Power Plug: IEC-C-19
- Cooling Fan Capacity: 6CFM back exhaust

### PHYSICAL SPECIFICATIONS

- Height: 1.75 inches (44.45mm) 1RU
- Width: 19 inches (482.6mm)
- Depth: 14 inches (355.6mm)
- Weight: 3.5 Lbs (1.59kg)

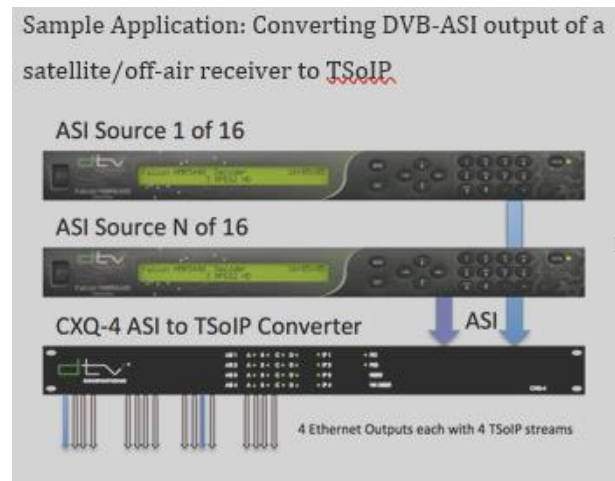

Made In The USA

VISION + INNOVATION

March 2024. Specifications subject to change without notice.